




Hot Dipped Galvanized Bar Grating For Walkway Platform Foot Plate heavy duty bar grating

Our Product Introduction

for more products please visit us on wire-metalmesh.com


Basic Information

- Place of Origin: China
- Brand Name: Yuda
- Certification: IOS
- Model Number: steel grating
- Minimum Order Quantity: 10pieces
- Price: \$10/m2
- Packaging Details: tray
- Delivery Time: 3-10days
- Payment Terms: T/T, L/C, D/A, D/P, Western Union, MoneyGram,
- Supply Ability: 5000pieces/day

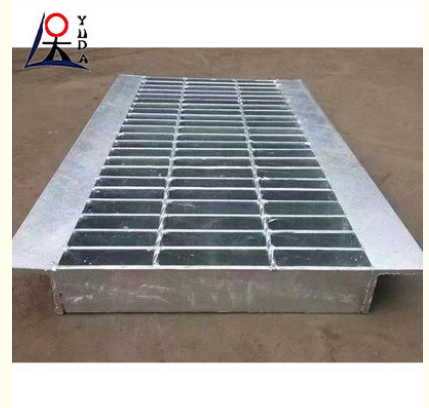

Product Specification

- Product Name: Steel Grating
- Key Words: Walkway Platform Foot Plate
- Material: Mild Steel
- Use: Industry
- Color: Silver
- Width: 0.5-2m
- Surface Treatment: Hot Dipped Galvanized
- Highlight: **Hot Dipped Galvanized Bar Grating, Galvanized Bar Grating For Walkway, 2m Heavy Duty Bar Grating**

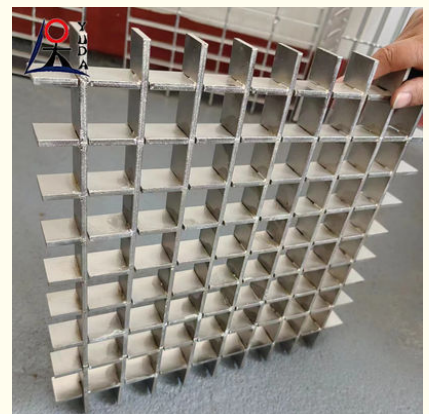

More Images




Product Description

Hot Dipped Galvanized Steel Bar Grating For Walkway Platform Foot Plate

Steel grating

The steel grid plate is also called the platform steel grid plate, and the platform grid plate is a steel product with a square grid in the middle, which is mainly used to make the steel structure platform plate, the step plate of the steel ladder, etc. The cross bar is generally made of twisted square steel.

Steel grid plate is generally made of carbon steel, the appearance of hot dip galvanized, can play a role in preventing oxidation. It can also be made of stainless steel. Steel grid plate with ventilation, lighting, heat dissipation, anti-slip, explosion-proof and other properties.

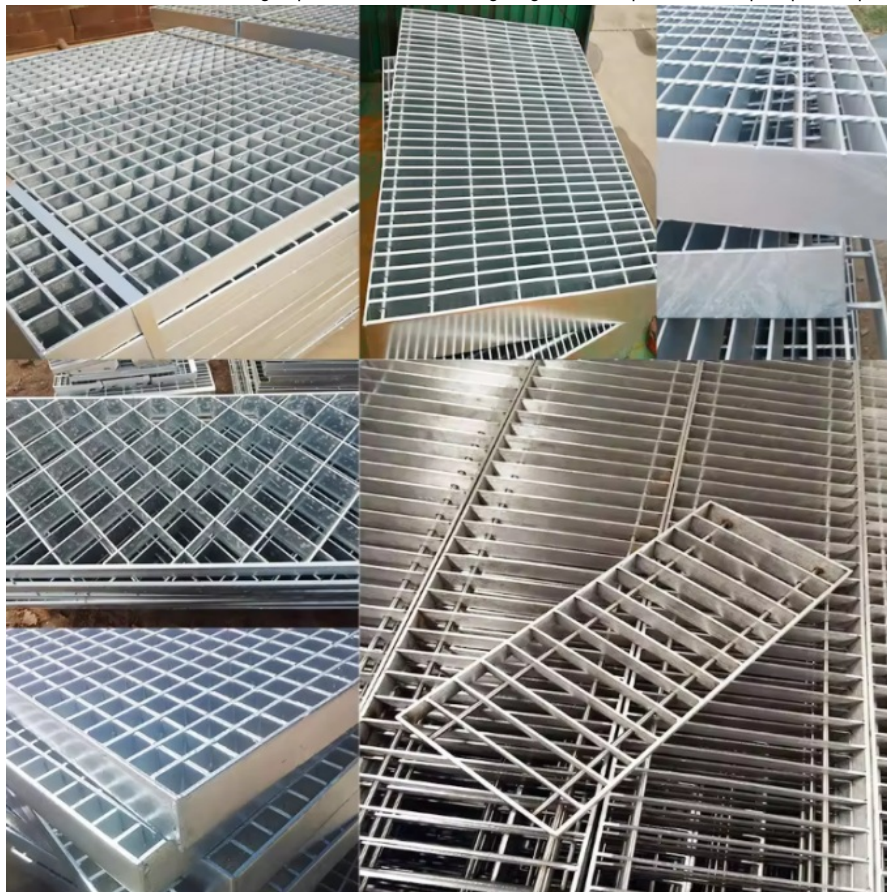

Steel grid specifications


- * Bearing bar size: 1" x 1/8" to 2-1/2" x 3/16" with 1/4" increments;
- * Bearing bar spacing (center-to-center): 1-3/16", 15/16", 11/16" and 7/16";
- * Cross bar spacing (center-to-center): 4" or 2". * Bearing bar size: 1" x 1/8" to 2-1/2" x 3/16" with 1/4" increments;
- * Bearing bar spacing (center-to-center): 1-3/16", 15/16", 11/16" and 7/16";
- * Cross bar spacing (center-to-center): 4" or 2".



Common Mesh Spacing for Bearing Bars from 2 to 3 mm of Common Press-Locked Steel Grating									
Bearing Bar (mm)	Cross Bar (mm)								
11.1	11.1	16.65		22.2	33.3	44.4	49.95	66.6	99.9
15	11.1	16.65		22.2	33.3	44.4	49.95	66.6	99.9
21	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9
22.2	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9
33.3	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9
44.4	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9
55.5	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9
66.6	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9
99.9	11.1	16.65	21.0	22.2	33.3	44.4	49.95	66.6	99.9

Steel grid plate features

- 1: High strength, light structure
- 2: Strong anti-corrosion ability, durable
- 3: Beautiful appearance, bright surface
- 4: no dirt, no rain, no water, self-cleaning, easy to maintain
- 5: ventilation, lighting, heat dissipation, anti-slip, explosion-proof

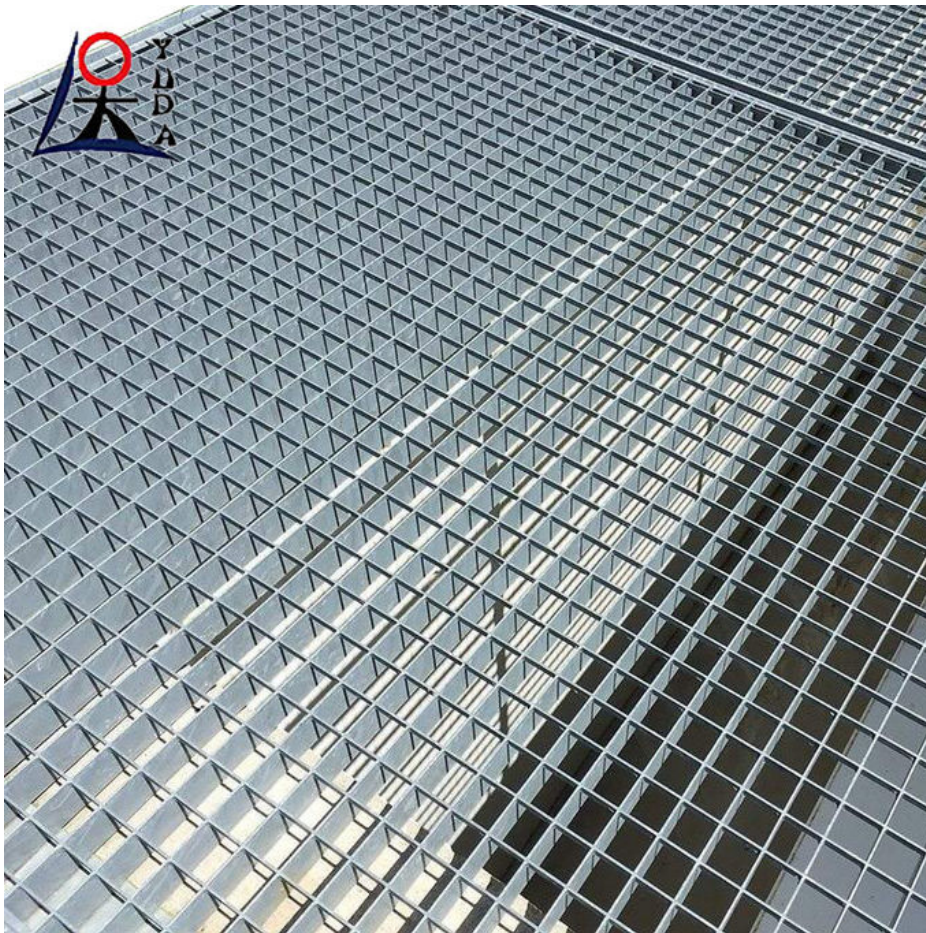

Press-Locked Steel Grating – Common, Integral, Louver, Heavy Duty

Press-locked steel grating also can be called pressure locked grating, it is made of low carbon steel or stainless steel. With the performance of high bearing capacity, non-slip, anti-corrosion and easy to install and remove, pressure locked grating is widely used for ceilings, platforms, floors, fence and all kinds of cover in the factories, civil and commercial buildings



Anping Yuda Wire Mesh Co., Ltd.



13785885555



sales@china-mesh-wire.com



wire-metalmesh.com

Xiwangzhuang Developing Zone, Anping, Hebei, China