

CHINA

YUDA

requirements

MoneyGram

5000 roll/ day

3-10 day



Hot Dipped Galvanized Concertina Razor Barbed Wire High Security BTO-22

Basic Information

- Place of Origin:
- Brand Name:
- Model Number: Barbed wire
- Minimum Order Quantity: 10 rollPrice: Determined by size and quantity
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

- Product Name:
- Key Words:
- Surface Treatment:
- Razor Type:
- Sample:
- Barb Distance:
- Barb Length:
- Coil Diameter:
- Highlight:
- Barbed Wire Barbed Iron Wire Galvanized,PVC Coated Cross Razor,Single Razor,barbed Wire Free 7.5cm-15cm 1.5cm-3cm 450mm-900mm

Customized according to buyer's

L/C, D/A, D/P, T/T, Western Union,

Hot Dipped razor barbed wire, Galvanized razor barbed wire, High Security razor barbed wire



More Images



Product Description

High Security BTO-22 Hot Dipped Galvanized Concertina Razor Barbed Wire

Razor barbed wire, also known as blade barbed wire or blade barbed net, is a new type of protective net. It has excellent characteristics such as aesthetics, economic practicality, good resistance effect, and convenient construction.

Material: Low carbon iron wire

Core Wire Diameter: 2.7±0.1mm / 2.5±0.1mm Razor Barbed sheet thickness: 0.45±0.05mm

Razor Loop Diameter: 600mm

Other Coil diameter for u choose: 450mm, 500mm, 600mm, 700mm, 800mm, 900mm, 1000mm. 450mm(3 clips), 500mm(3 clips), 600mm(3 clips)900mm(5 clips) are the usually sizes Razor Barbed Wire per coil weight: Be produced as customers requirements. (common weight is 7KG 10KG, 12kg,14kg)

The manufacturing process of blade stabbing rope usually includes three main steps:

Punching (or rolling): Processing raw materials into the shape of blades.

Wire wrapping: wrap the punched and rolled blade Flat noodles onto the hot plated steel wire, iron wire or stainless steel wire to form a semi-finished blade thorn rope. During this process, the blade stabbing rope is wound into rolls with a customized diameter and number of turns by the customer.

Buckle: Insert the circular blade into the buckle and complete the entire production process.

Outside Diameter	No.of Loops	Standard Length per Coil	Туре	Notes
450 mm	33	8m	CBT-65	Single coil
500 mm	41	10m	CBT-65	Single coil
700 mm	41	10m	CBT-65	Single coil
960 mm	53	13m	CBT-65	Single coil
500 mm	102	16m		Cross type
600 mm	86	14m		Cross type
700 mm	72	12m	BTO-10.15.22	Cross type
800 mm	64	10m	BTO-10.15.22	Cross type
960 mm	52	9m	BTO-10.15.22	Cross type

FAQ

1. What's your adventage?

Honest business with competitive price and professional service on export process.

2. Can I customize the products?

Yes, as long as provide specifications, drawings, can only do what you want products

3. How can I know how my order is being done?

We will inspect and test all items in order to avoid damage and missing parts before shipping.

The detailed inspection pictures of the order will be sent to you for your confirmation before delivery. 4. Can you give warranty of your products?

Yes, we extend a 100% satisfaction guarantee on all items. Please feel free to feedback immediately if you are not pleased with our quality or service. For the overseas orders, we guarantee most accessories. Provided emails with details including pictures or short video, we will send guide manual or replacements at our cost to repair.

5. How about the payment terms?


T/T (with 30% deposit), L/C at sight. Western Union. Paypal.





Razor barbed wire material

Our products are made of high quality stainless steel and galvanized sheet

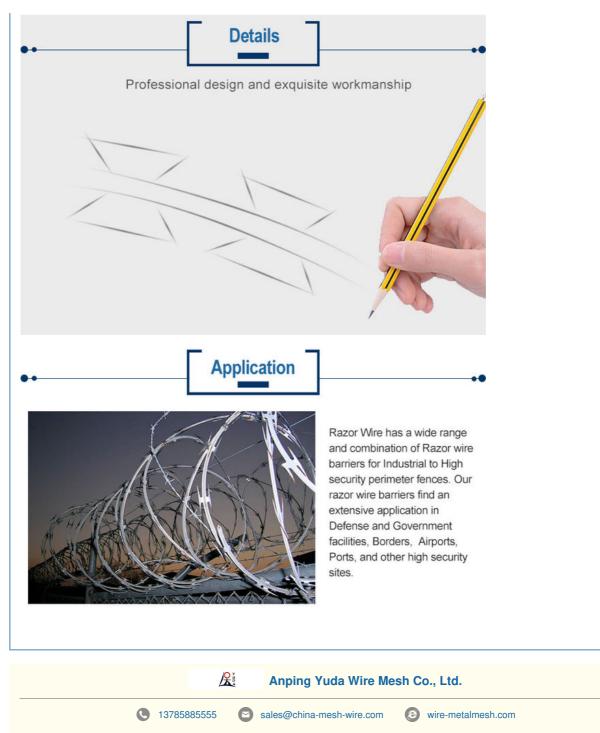

Xiwangzhuang Developing Zone, Anping, Hebei, China