




Alkali Resistant Reinforced Wall Construction Fiberglass Facade Mesh Fiberglass Mesh

Our Product Introduction

for more products please visit us on wire-metalmesh.com


Basic Information

- Place of Origin: CHINA
- Brand Name: YUDA
- Certification: IOS
- Model Number: Glass fibre mesh
- Minimum Order Quantity: 100 Square Meter
- Price: US \$0.15 - 0.35/ Square Meter
- Packaging Details: Customized according to buyer's requirements
- Delivery Time: 3-10 day
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 rolls/ day

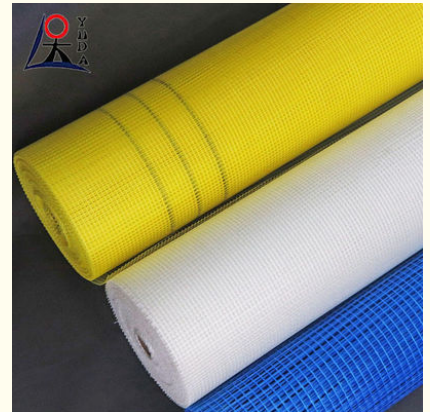


Product Specification

- Product Name: Fiberglass Mesh
- Key Words: Alkali Resistant Reinforced Wall Construction Fiberglass Facade Mesh Fiberglass Mesh
- Material: Fiberglass Yarn
- Apertue: 4*4mm, 5*5mm Etc.
- Feature: Alkaline-resistant
- Size: 1x50m, 20cm*300m, 5cmx90m
- Weave Type: Leno, Plain, Twill
- Artwork: Leno Woven
- Highlight: **Alkali Resistant Fiberglass Mesh, Construction fibreglass reinforcing mesh, Alkali Resistant fiberglass mesh for concrete**

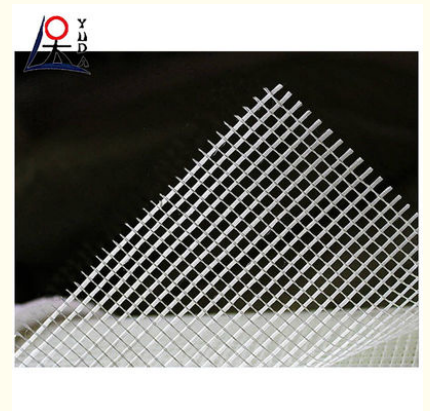

More Images



Product Description

Alkali Resistant Reinforced Wall Construction Fiberglass Facade Mesh Fiberglass Mesh



Fiberglass Mesh Cloth

- ✓ 100% C Glass E Glass Fiberglass Yarn
- ✓ Professional Manufacturer Production
- ✓ Fast Delivery, Low MOQ
- ✓ Full Range Of Specifications

Glass fiber mesh cloth

Product information: Glass fiber woven fabric is Glass fiber mesh cloth's base material, can be widely used in building internal and external wall insulation, waterproof, fire prevention, crack resistance and so on. It has good alkali resistance, flexibility and high tension resistance. Glass fiber mesh cloth uses alkali free glass fiber yarn (main composition is silicate, good chemical stability) by special organizational structure - yarn fabric skein woven, after the anti-alkali liquor, reinforcing agent and other high temperature heat setting treatment.

Reinforced Fiberglass Wall Mesh Specification:

Item Number	Yarn(Tex)		Mesh(m m)		Density Count/25mm		Tensile Strength × 20cm		Woven Structure	Content of resin%
	Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft		
45g 2.5x2.5	33x2	33	2.5	2.5	10	10	550	300	Leno	18
60g 2.5x2.5	40x2	40	2.5	2.5	10	10	550	650	Leno	18
70g 5x5	45x2	200	5	5	5	5	550	850	Leno	18
80g 5x5	67x2	200	5	5	5	5	700	850	Leno	18
90g 5x5	67x2	250	5	5	5	5	700	1050	Leno	18
110g 5x5	100x2	250	5	5	5	5	800	1050	Leno	18
125g 5x5	134x2	250	5	5	5	5	1200	1300	Leno	18
135g 5x5	134x2	300	5	5	5	5	1300	1400	Leno	18
145g 5x5	134x2	360	5	5	5	5	1200	1300	Leno	18
150g 4x5	134x2	300	4	5	6	5	1300	1300	Leno	18
160g 5x5	134x2	400	5	5	5	5	1450	1600	Leno	18
160g 4x4	134x2	300	4	4	6	6	1550	1650	Leno	18
165g 4x5	134x2	350	4	5	6	5	1300	1300	Leno	18



Glass fiber mesh, fiberglass plaster net, fiberglass mesh netting

SPECIFICATION

Material:	Fiberglass Yarn		
Coating:	Latex, Urine Glue		
Weight (grams/sq m):	60g - 300g/m²		
Length:	10m-300m		
Width:	4.5cm-2m		
Color:	White(standard),red, yellow, blue, green, gray, black or other colors		
Mesh Size	Density(grams/sqm)	Width(m)	Length per roll(m)
4 x 5	160	4.5cm-2m	10-300m
5 x 5	80,100,125,145		
6 x 6	240,300		
Other specifications , accept customization			

1. 75g / m² mesh fabric used in the reinforcement of thin slurry, to eliminate small cracks and scattered throughout the surface pressure.
2. 110g / m² mesh cloth is widely used in indoor and outdoor walls, prevent the various materials (such as brick, light wood, prefabricated structure) of treatment or caused by a variety of expansion coefficient of wall crack and break .
3. 145g/m² mesh fabric used in the wall and be mixed in various materials (such as brick, light wood, prefabricated structures), to prevent cracking and scatter the whole surface pressure, especially in the external wall insulation system (EIFS).
4. 160g / m² mesh fabric used in insulator layer of reinforcement in the mortar, through shrinkage and temperature changes by providing a space to maintain movement between the layers, prevent crack and rupture due to shrinkage or temperature change.



HIGH DEGREE OF ALKALI RESISTANCE

Stable material
High alkali resistance
Durable



THE MATERIAL IS RELIABLE AND RELIABLE

Does not contain earthen
pot silk and toxic urine glue,
use it with confidence



Anping Yuda Wire Mesh Co., Ltd.



13785885555



sales@china-mesh-wire.com



wire-metalmesh.com

Xiwangzhuang Developing Zone, Anping, Hebei, China