

Hot Dip Galvanized Catwalk Steel Grating Drainage Steel Grating Cover Drainage

Basic Information

Place of Origin: ChinaBrand Name: YudaCertification: IOS

Model Number: steel gratingMinimum Order Quantity: 10pieces

• Price: Further discussion based on quantity

Packaging Details: trayDelivery Time: 3-10days

Payment Terms: T/T,L/C,D/A,D/P,Western

Union,MoneyGram,

Supply Ability: 5000pieces/day



Product Specification

• Features: High Strength, Anti-corrosion, Anti-slip, Easy

To Install

Product Name: Steel Grating

Key Words: Hot Sell Metal Building Materials Hot Dipped

30 X 3mm Galvanized Steel Grating

Material: Mild Steel
Use: Industry
Crossing Rod: 6mm X 6mm
Width: 0.3-1.5m

• Bearing Bar Type: Plain Type, Serrated Type, I Bar Type

• Highlight: Drainage Steel Grating Cover,

Drainage Steel Grating,
Hot Dip Galvanized Steel Grating



More Images



Product Description

Hot Dip Galvanized Catwalk Steel Grating Drainage Steel Grating Cover Drainage

Steel Grating made by welding with flat steel and cross/round bars with certain distances. Our Steel Grating enjoy the feature of high strength, light structure, high bearing, convenience for loading and other properties. The hot dipped zinc coating gives the product excellent anti-corrosion.

Grid grid indicates the processing method:

Hot dip galvanizing, cold dip galvanizing, painting, immersion in rust proof oil, no treatment (generally stainless steel materials do not require treatment).

Product Name	steel grating
Material	galvanized steel / stainless steel
Surface	plain / serrated
Bearing bar	Flat bar
Cross bar	Twisted bar / flat bar / round bar
Length(span)	support customization
Width	support customization
Bearing bar depth	25-60mm
Bearing bar thickness	3-5mm/ support customization
Bearing*cross bar pitch	30*30mm/ 30*50mm/ 30*100mm/ suppot customization

advantages:

Material saving: The most material efficient way to withstand the same load conditions, which can correspondingly reduce the material required for the supporting structure.

Reduce investment: save materials, labor, construction period, free cleaning and maintenance.

Easy construction: Use bolts to clamp or weld fixed onto pre installed supports, which can be completed by one person.

Save time: The product does not require on-site processing and installation is very fast.

Durable: It undergoes hot-dip galvanizing anti-corrosion treatment before leaving the factory, with strong resistance to impact and heavy pressure.

Modern Style: Beautiful appearance, standardized design, ventilated and transparent, giving people a smooth and modern feeling as a whole.

Lightweight structure: with minimal materials, lightweight structure, and easy lifting.

Anti accumulation of dirt: does not accumulate rainwater, ice, snow, and dust.


Reduce wind resistance: Due to good ventilation, the wind resistance is small when encountering strong winds, reducing wind damage.

Ventilation, lighting, heat dissipation, explosion-proof, good anti slip performance: acid and alkali corrosion resistance: within the range of pH 6 to pH 12.5, a stable protective film is formed on the surface of the zinc layer, with good corrosion resistance.







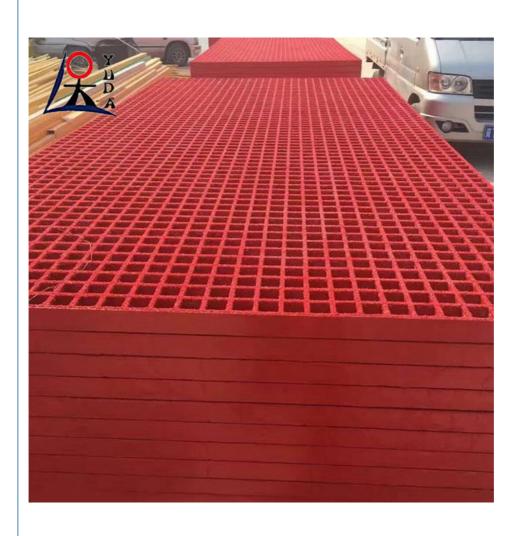

Xiwangzhuang Developing Zone, Anping, Hebei, China